Everything's Possible

Xerox[®] PrimeLink[®] C9265/C9275/C9281 Printer.











It's Time to Embrace Agility

When requests change by the minute, you need a printer that makes everything possible—luxury output, countless options for office and production-level feeding and finishing, with speedy, effortless workflows that help work get done faster. That's the all-new Xerox[®] PrimeLink[®] C9200 Printer Series.

NOW, ANYONE CAN PRINT LIKE A PRO

You'll do more with Xerox® PrimeLink® a new light production engine that delivers more power with print speeds of up to 81 prints per minute. Whether you run an office, agency, university, or print production shop, Xerox® PrimeLink® is ready to enhance your image with seamless support and the broadest range of capabilities in the light production market.

LUXURY OUTPUT QUALITY

Image quality beyond what you'd expect from an office printer, with high-definition, highly engaging colour output. Plus:

Crisp, rich black text and pristine, full-gamut colour graphics with High Definition Emulsion Aggregate (HD EA) Toner

Optimized 0.5 mm front-to-back registration to keep all your content exactly where you want it

More stable and accurate quality with new energy-efficient LED print technology, providing 2400 x 2400 dpi imaging

Accurate density and colour quality with advanced Simple Image Quality Adjustment (SIQA)

Support for expanded Extra-long Sheet (XLS) printing at greater sizes (51 in./1,300 mm)

Reliable envelope feeding in a wide array of sizes comes standard—no special kit required





WIDE RANGE OF FEEDING AND FINISHING

Effortless production of any run—small to large—with inline finishing on virtually any media ensures you're set up for success.

- Offer more applications with greater media flexibility, up to 400 gsm, and sizes up to 51 in./1,300 mm
- Optimize your printer for every job with Custom Stock Libraries
- Get big capability and productivity in a space-saving footprint

A PRINTER SO FUN TO USE, WORK WON'T FEEL LIKE WORK

When it comes to working better, it's all about efficiency and excellence. The new Integrated Colour Server for the Xerox® PrimeLink® C9200 Printer Series delivers that and more (standard) with ready-to-use workflows and advanced print features, accessed via a 10-inch touchscreen for tap-and-print/copy/scan convenience.

The Xerox® EX and EX-i C9200 Series Print Servers Powered by Fiery® (optional) offer production tools familiar to print shops and in-printers—including a wide range of Fiery® offerings for advanced colour management, job set-up, and more.

SPEEDY, EFFORTLESS WORKFLOWS AND CUSTOMIZATION

Time- and talent-saving automation with the potential to transform your workflows—and your working environment.

- Accelerate your work with Xerox[®] FreeFlow[®] Core and other FreeFlow[®] Workflow Software solutions
- Monitor, measure, and manage your printer or entire fleet with Xerox[®] FreeFlow[®] Vision Software
- **Connect and create** with the Xerox[®] Connect App for XMPie for creative new applications, including preloaded templates for personalization
- Seamlessly print from any device with support for mobile printing via the Xerox® @PrintByXerox App

With dozens of security features and certifications, Xerox® PrimeLink® is ready to meet and exceed your organization's protocols. Our multi-layered approach to security is designed around three principles to ensure ongoing protection and compliance whatever your field or industry.

The All-new, From-the-ground-up Xerox[®] PrimeLink[®] C9200 Printer Series



Shown: Fiery® EX Print Server, Two-tray Oversized High Capacity Feeder, Xerox® PrimeLink® C9200 Printer Series, Xerox® Crease Two-sided Trimmer, Xerox® Production Ready Booklet Maker Finisher, Xerox[®] SquareFold[®] Trimmer



65/75/81 ppm



Media weights: Up to 400 gsm




Banner media: Up to 51 in./1,300 mm

Standard (5-tray) capacity:

3,500 sheets (with optional One-tray Oversized High Capacity Feeder [OHCF]) 7.500 sheets (with Two-tray OHCF)

- 1 Optional one- or two-tray Oversized High Capacity Feeders (OHCF)
- 2 Tray 5 (Multi-sheet Inserter (MSI)/Bypass tray)
- 3 Remote user interface
- Smart proximity sensor 4
- 5 Dual-head colour scanner up to 270 ipm
- 6 Standard trays 1-5
- 7 Optional Xerox[®] EX or EX-i C9200 Series Print Servers Powered by Fiery®
- Standard Integrated Colour Server for the 8 Xerox[®] PrimeLink[®] C9200 Printer Series

- 9 High Definition Emulsion Aggregate (HD EA) toner
- 10 LED print technology
- 11 Intelligent/Advanced decurler
- 12 Registration: 0.5 mm front-to-back
- 13 Custom stock library
- 14 Redesigned paper path
- 15 Xerox[®] Crease Two-sided Trimmer
- 16 Xerox[®] SquareFold[®] Trimmer Multiple finishing options for production print and office environments

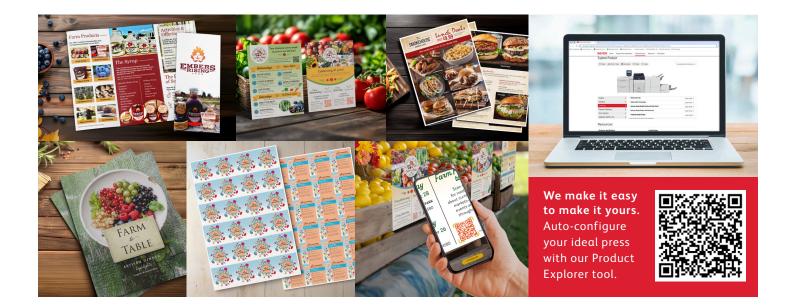

Xerox[®] PrimeLink[®] C9265/C9275/C9281 Printers

DEVICE SPECIFICATIONS	PRIMELINK C9265		PRIMELINK C9275		PRIMELINK C928	1
SIMPLEX SPEEDS	Colour	Black-and-white	Colour	Black-and-white	Colour	Black-and-white
8.5 x 11 in./A4	Up to 65 ppm	Up to 65 ppm	Up to 75 ppm	Up to 75 ppm	Up to 81 ppm	Up to 81 ppm
11 x 17 in./A3	Up to 34 ppm	Up to 34 ppm	Up to 37 ppm	Up to 37 ppm	Up to 42 ppm	Up to 42 ppm
12 x 18 in./SRA3	Up to 30 ppm	Up to 30 ppm	Up to 34 ppm	Up to 34 ppm	Up to 38 ppm	Up to 38 ppm
Printer Dimensions	Height: 45.4 in./1,154 mm; Width: 62 in./1,575 mm; Depth: 31.2 in./793 mm (includes Bypass Tray and Offset Catch Tray)					
Monthly Duty Cycle	Up to 300,000 pages (maximum volume capacity expected in any one month, not intended to be sustained regularly)					
Average Monthly Print Volume (AMPV)	10,000 to 60,000 pages per month					
Paper Flexibility/Weights	Standard Paper Capacity: 3,500 sheets: (Tray 1 and 2: 540 sheets, Tray 3: 890 sheets, Tray 4: 1280 sheets, Tray 5 (MSI/Bypass): 250 sheets)					
Paper Flexibility/weights	Maximum Paper Capacity: 5,500 sheets (Tray 1 and 2: 540 sheets, Tray 3: 890 sheets, Tray 4: 1280 sheets, Tray 5 (MSI/Bypass): 250 sheets, Two-tray Oversized High					
	Capacity Feeder: 4,000 sheets					
	Sizes: Tray 1: 3.93 x 5.82 in. (100 x 148 mm) to 13 x 19.2 in. (330.2 x 488 mm); Tray 2: 3.93 x 5.82 in. (100 x 148 mm) to 13 x 19.2 in. (330.2 x 488 mm); Tray 3: 7.25 x 10.5 i					
	(184 x 267 mm) to 8.5 x 11 in./A4; Tray 4: 7.25 x 10.5 in. (184 x 267 mm) to 8.5 x 11 in./A4					
Image Quality Print Technology	Setting a new, higher benchmark for light production image quality with LED technology, the printer delivers 2400 x 2400 dpi resolution using advanced HD LED and HD I					
	Toner for exceptional clarity and vibrant, rich colours					
Line Screens Registration	It supports 150/200/300/600 dot screens, a 200-line screen, stochastic screening, and enhanced text and graphics					
	Cutting-edge registration technology for tight control					
	Simple Image Quality Adjustment (SIQA) for de-skew, registration, and density uniformity (available on all configurations)					
Print Features	+/- 0.5 mm; variation may occur based on paper size, tray, etc.					
Print Features		x (optional), including scan to PC,	 51 in./1,300 mm XLS or 	Banner sheet size (Tray 5) su	pporting up to 220 gsm	
	USB, or email, and mobile printing 26 in./660 mm XLS or Banner sheets in Tray 5 with OHCF up to 220 gsm 					
	 The expansive media range allows you to print everything from postcards to posters, on both coated and uncoated Up to 400 gsm media weight (Tray 5 and Two-tray OHCF only), with auto-duplex printing up to 350 gsm media weight (Tray 5 and Two-tray OHCF only), with auto-duplex printing up to 350 gsm media weight (Tray 5 and Two-tray OHCF only), with auto-duplex printing up to 350 gsm media weight (Tray 5 and Two-tray OHCF only), with auto-duplex printing up to 350 gsm media weight (Tray 5 and Two-tray OHCF only), with auto-duplex printing up to 350 gsm media weight (Tray 5 and Two-tray OHCF only). 					
	stock, up to 400 asm (Bypass Tray and OHCF)					
	The Xerox Extensible Interface Platform® (EIP) enables Xerox® replaceable units for toners, drums, fuser, charge corotron, waste bottles, staples					
	connectivity with third-party software solutions • Custom Paper Setup and Paper Catalog					
	 Inline finishing options provide a professional polish, including banner printing, stapling, hole punching, folding, Dead-while-run toner and paper capability 					
	booklet stitching, creasing, and three-knife trimming—for Kemote UI and Smart Proximity Sensor					
	booklets, stitched presentations, reports, and newsletters • Optional Features: Common Access Card Enablement Kit, Accounting Options, PostScript with					
	Stay secure with integrated security features such as Integrated Colour Server Internet Protocol (IP) filtering, image overwrite, secure print,					
		ering, image overwrite, secure print, , authentication. and IPv6 support				
Servers	Required	autoritication, and in to support	Optional			
	Integrated Colour Server for the Xerox® EX-i C9200 Series Print Server Powered by Fiery® (FS600 Platform)					
	Xerox [®] PrimeLink [®] C9200 Printer Series • Xerox [®] EX C9200 Series Print Server Powered by Fiery [®] (FS600 Platform)					
Integrated Scanner	Single-pass Automatic Duplex Document Feeder Up to 270 ipm (colour, up to 200 gsm)					
	Colour or black-and-white scanner Up to 270 ipm (black-and-white, up to 200 gsm)					
	 Thumbnail preview, XPS, TIFF, JPEG, Originals up to 11 x 17 in./A3 in weights from 38 gsm/16 lb. bond to 200 gsm/53 lb. bond Scan to searchable text PDF (Optional), PDF/A Auto Document Feeder and platen places used with SIOA (Tray to Paper registration) 					
	Scan to searchable text PDF (Optional), PDF/A Auto Document Feeder and platen glass used with SIQA (Tray to Paper registration) 250-sheet capacity					
Optional Feeding	• 250-sheet capacity Optional High Capacity Feeder (HCF): 2,000 sheets; 7.25 x 10.5 in., 8.5 x 11 in./184.2 x 266.7 mm, 279.4 x 215.9 mm/ B5, A4; 16 lb. bond to 60 lb. cover/60 to 220 gsm					
	(uncoated and coated)					
	Optional Oversized High Capacity Feeder (OHCF): One-Tray OHCF:o Capacity: 2,000 sheets + storage cabinet, Tray 6 – 3.9 × 5.8 in./100 × 148 mm to 13 × 19.2 in./330					
	488 mm (60 to 350 gsm) Two-Tray OHCF: o Capacity: 4,000 sheets Tray 6 and 7 – 3.9 × 5.8 in./100 × 148 mm to 13 × 19.2 in./330 × 488 mm (60 to 400 gsm)					
		Maximum banner sheet (XLS) is 13x 2	-			
Optional Finishing	Business Ready Finisher 2.0: Offsetting Top Tray: 500 sheets 8.5 x 11 in./A4, unstapled. Stacking Stapling Tray: 3,000 sheets unstapled or 100 sets (dual or 4-position staple) 11 x 17 in., 8.5 x 14 in., A3 or 200 sets (single-position staple) 8.5 x 11 in./A4. Sizes: Stacking; 4 x 6 in. to 13 x 19.2 in./A6 to SRA3, Stapling; 7.25 x 10.5 in. to 11 x 17 in./B5					
	staple) 11 x 1/ in., 8.5 x 14 in., A3 or 200 sets (single-position staple) 8.5 x 11 in./A4. Sizes: Stacking; 4 x 6 in. to 13 x 19.2 in./A6 to SRA3, Stapling; 7.25 x 10.5 in. to 11 x 1/ in./B2 to A3. Other; 5.5 x 8.5 in./A5 output to top tray; punch and offset. Paperweights: Top Tray: 16 lb. bond to 110 lb. cover/60 to 350 gsm (coated and uncoated). Stacker Tray: 16					
	bond to 96 lb. cover/60 to 256 gsm (coated and uncoated).					
	Business Ready Finisher Booklet Maker Finisher 2.0: Offsetting Top Tray: 500 sheets 8.5 x 11 in./A4 unstapled. Stacking Stapling Tray: 1,500 sheets unstapled or 200 sets (single					
	position stapling or dual or 4-position staple) or 100 stapled sets of 11 x 17 in./A3/SRA3. 11x17 in., 8.5 x 14 in., A3 or 200 sets (single-position staple) 8.5 x 11 in./A4. Sizes: Stacking; 4 x					
	6 in. to 13 x 19.2 in./A6 to SRA3. Stapling; 7.25 x 10.5 in. to 11 x 17 in./B5 to A3. Other; 5.5 x 8.5 in. /A5 output to top tray; punch and offset. Paperweights: Top Tray: 16 lb. bond to 130 lb cover/60 to 350 gsm (coated and uncoated). Booklet Maker: 16 lb. bond to 110 lb. cover/256 to 300 gsm					
						ei/250 to 500 gsili
	cover (uncoated, 106 to 220 gsm (coated)). Booklet Maker/Saddle-stitch 2 to 16 sheets (7 sheets at 106 to 176 gsm coated or 5 sheets at 177 to 220 gsm coated). Xerox [®] Production Ready Finisher (requires Interface Decurler Module): Booklet Size: 100 sheets (90 gsm) uncoated, 35 sheets (90 gsm) coated. Paper Size: 7.2 x 5.7 in./					
	182 in. x 146 mm to 11.7 x17 in./297 x 432 mm. Maximum Weight: 350 gsm. Options: Punch, Inserter, and C/Z Folder. Trays: Two output trays, 500-sheet top tray, 3,000-sheet					
	stack tray of 5.83 x 5.75 in. /148 x 146 mm to 13 x 19.2 in./330 x 488 mm.					
	Xerox® Production Ready Booklet Maker Finisher (requires Interface Decurler Module): Booklet Size: 7.17 x 7.17 in./182 x 182 mm to 13 x 19.2 in./330 x 488 mm up to					
	256 gsm. Trays: 500-sheet top tray, 2,000-sheet stack tray, saddle-stitch booklet tray (up to 120 pages, 30 sheets/90 gsm uncoated, 15 sheets/106 gsm coated).					
	Offset Catch Tray: 500 sheet stacking.					
	Xerox® SquareFold® Trimmer Module: Face Trim: 120 pages (30 sheets). Compatibility: Xerox® Production Ready Finisher, Xerox® Production Ready Booklet Maker Finisher					
	and Xerox® Crease and Two-Sided Trimmer.					
	Xerox® C/Z Folder: Sheet Size: 8.5 x 11 in./A4. Half Z-fold Sheet Size: Larger stocks reducing to 8.5 x 11 in./A4. Weight Range: 64 to 90 gsm. Compatibility: Xerox®					
	Production Ready Booklet Maker Finisher.					
	Xerox® Inserter: Capacity: 250 sheets. Capabilities: Trimming, punching, folding, stapling, and stacking. Paper Size: 7.2 x 5.8 in./182 x 148 mm to 13 x 19.2 in./330 x 488 mm. Maximum Weight: 350 qsm. Compatibility: Xerox® Production Ready Finisher.					
	Xerox® Crease Two-sided Trimmer: Trim Range: 0.236 in./6 mm to 0.985 in./25 mm. Paper Size: 7.7 x 8.3 in./194 x 210 mm to 13 x 19.2 in./330 x 488 mm.					
	Maximum Weight: 350 gsm. Compatibility: Xerox® Production Ready Booklet Maker Finisher. Buffering Unit: Up to five customizable mountain or valley creases per sheet.					
	For more optional finishing, refer to the Product Explorer at explorexeroxproducts.com/Product.					
Xerox App Gallery	Visit xerox.com/AppGallery	to learn how you can expand the cap	abilities of the Xerox® PrimeLi	nk® C9265/C9275/C9281 Prin	ter Series and work in new wa	ys with dedicated

Configurations may vary by geographical location.

For more information, visit www.xerox.ca

© 2025 Xerox Corporation. All rights reserved. Xerox®, PrimeLink®, SquareFold®, and Xerox Extensible Interface Platform® are trademarks of Xerox Corporation in the United States and/or other countries. XMPie® is a trademark of XMPie Inc. The information in this brochure is subject to change without notice. 06/25 TSK-7258 BR40622 P92BR-01CB

